


Typical values

Nessol D60

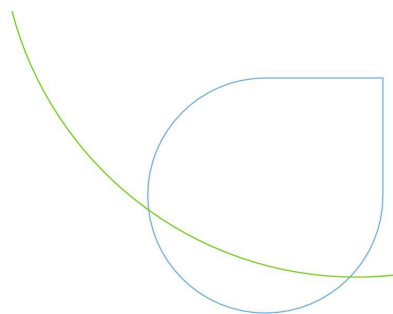

15/10/2019

Important info :

This sheet does not provide the specifications but only informed about the typical values reached by our product, for more info contact your specialty product team: specialty.products@neste.com

Properties	Unit	Typicals	Test Method
Appearance	-	C&B	ASTM D4176
Colour, Saybolt	-	> 30	ASTM D6045
Density at 15°C	kg/m³	~ 790	EN ISO 12185
Flash point	°C	~ 63	EN ISO 2719
Distillation			
IBP	°C	~ 181	EN ISO 3405
90 %	°C	~ 208	
Dry point	°C	~ 218	
FBP	°C	~ 220	
Viscosity			
at 20°C	mm²/s	~ 1.8	EN ISO 3104
at 40°C	mm²/s	~ 1.3	
Aromatics	ppm	~ 40	UOP 495
Naphthalenes	mg/l	< 2	UOP 495
Alkylbenzenes	mg/l	~ 40	UOP 495
Benzene	mg/l	< 1	NM 111 (GC-MS)
Toluene	mg/l	< 1	NM 111 (GC-MS)
Xylene	mg/l	< 1	NM 111 (GC-MS)
Aniline point	°C	~ 70	ISO 2977
Sulfur content	mg/kg	< 1	EN ISO 20846
Doctor test	-	Negative	ASTM D4952
Copper corrosion	-	1a	EN ISO 2160
Bromine index	mg Br/100g	15 - 40	ASTM D2710
Kauributanol value	-	~ 32	ASTM D1133
Refractive index	-	~ 1.436	ASTM D1218
Smoke point	mm	~ 28	ASTM D1322